


# STACKER DOORS (3 & 6 PANEL)

## AA SERIES

Stacker doors are a natural evolution of the sliding door. Similar in concept, in practice they incorporate another row of sliding panels into a broader product, typically able to span larger distances. A similarly-stacking fly screen is a popular option



The secure lock assembly features anti-lift pins & is key lockable from both sides (above). An instile lock & architectural handle (shown below) is an optional upgrade (satin-chrome finish only)

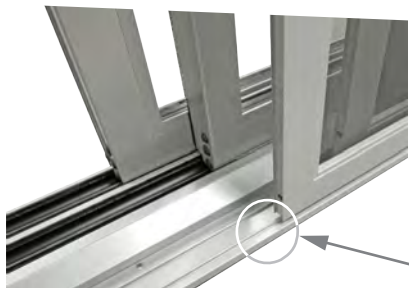

All panels roll on two 80kg rated, ball-bearing carriages which run on anodised track inserts

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. Sliding panels are weatherproofed through dual wool-pile seals at the head, jamb, sill & interlocker


When specified, flyscreens run on their own tracks, which fix neatly to the exterior of the door frame



# STACKER DOORS (3 & 6 PANEL)



## AA SERIES

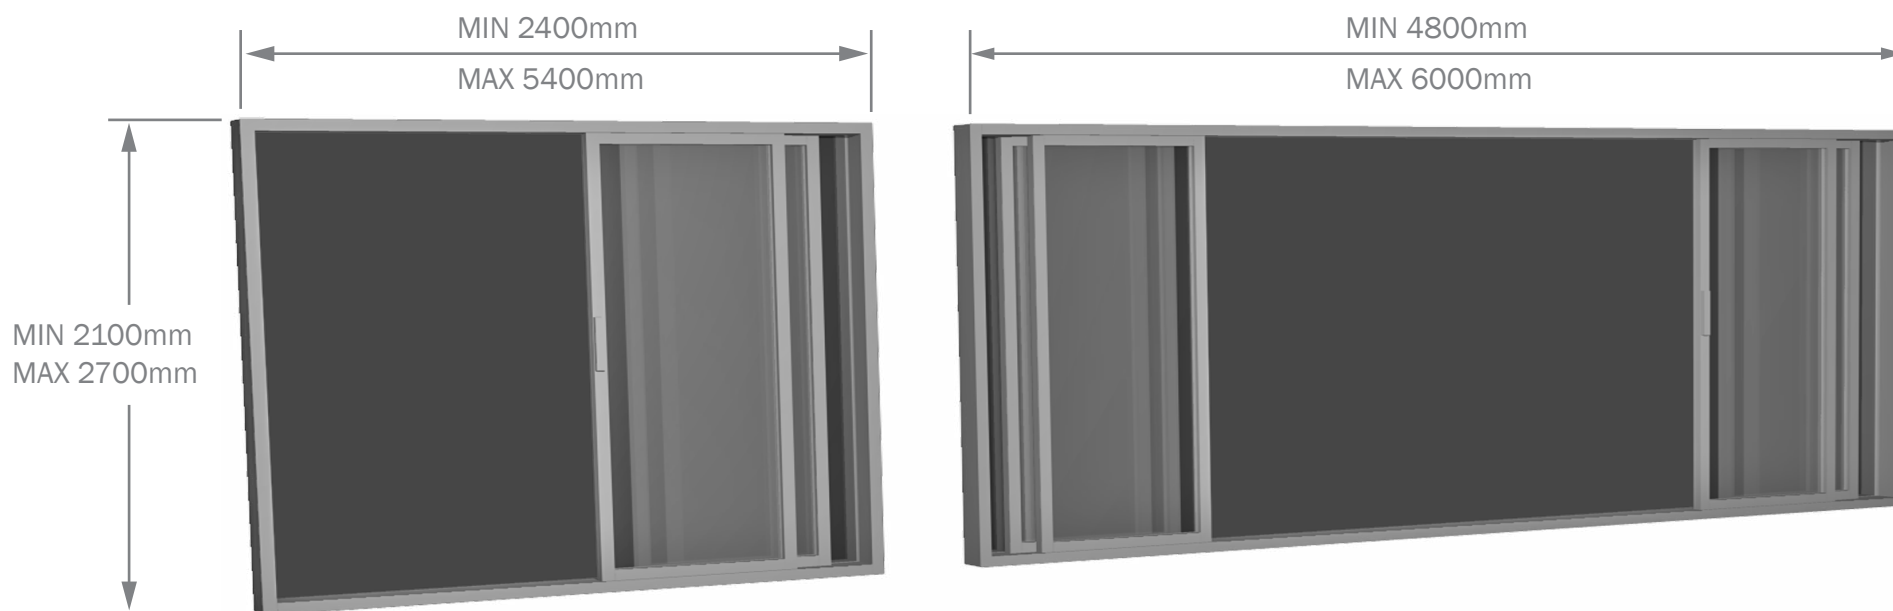

**NOTE:** ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE PLEASE TALK WITH YOUR RYLOCK SALES CONSULTANT. NOTE THAT FLYSCREEN DOORS OVER 1200mm IN WIDTH WILL REQUIRE A SPREADER BAR TO RETAIN TENSION, & SCREENS WITH STAINLESS STEEL MESH CAN ONLY BE SUPPLIED TO A MAXIMUM WIDTH OF 1500mm.

### Sizing

Door style & opening detail should be considered as viewed externally

Sizes indicated are the overall door size. For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Glazing to be grade A safety glass

### Certification

Certified performance data is available for this product on request

### Specify

Frame colour, configuration, height, width & depth

Optional: handle type & colour (where applicable), dummy handles, patio bolts, flyscreen, frame infill, frame equaliser, sill flap, glass type