

COUNTER BALANCED DOUBLE-HUNG WINDOW



AA SERIES

Double hung windows introduce unparalleled recirculation of air, through simultaneous operation of top & bottom panels. Warm air moves through the upper opening, whilst cooler air travels largely through the lower



The combination of slender aluminium sashes & their clever location within the frame realises a window with clean lines & large viewable openings

Multiple weather seals within frame & sashes exclude rain, draughts & intrusive sound. This window is also rated for use in air-conditioned buildings

Flyscreens fit neatly & securely on the outer face of the window frame

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. Co-extruded santroprene seals resist shrinkage & also assist with weatherproofing

Mitred corners enhance the product's clean appearance.
All fixings are made from durable stainless steel



Pre-stretched, engineered rope runs through the counter balance pulleys. These rotate on sealed roller bearings, ensuring unparalleled ease of use, strength & durability




A stainless steel housing contains key-locking for vent & fully closed positions

The timber reveal sits inline with the frame's outer face

COUNTER BALANCED DOUBLE-HUNG WINDOW



AA SERIES

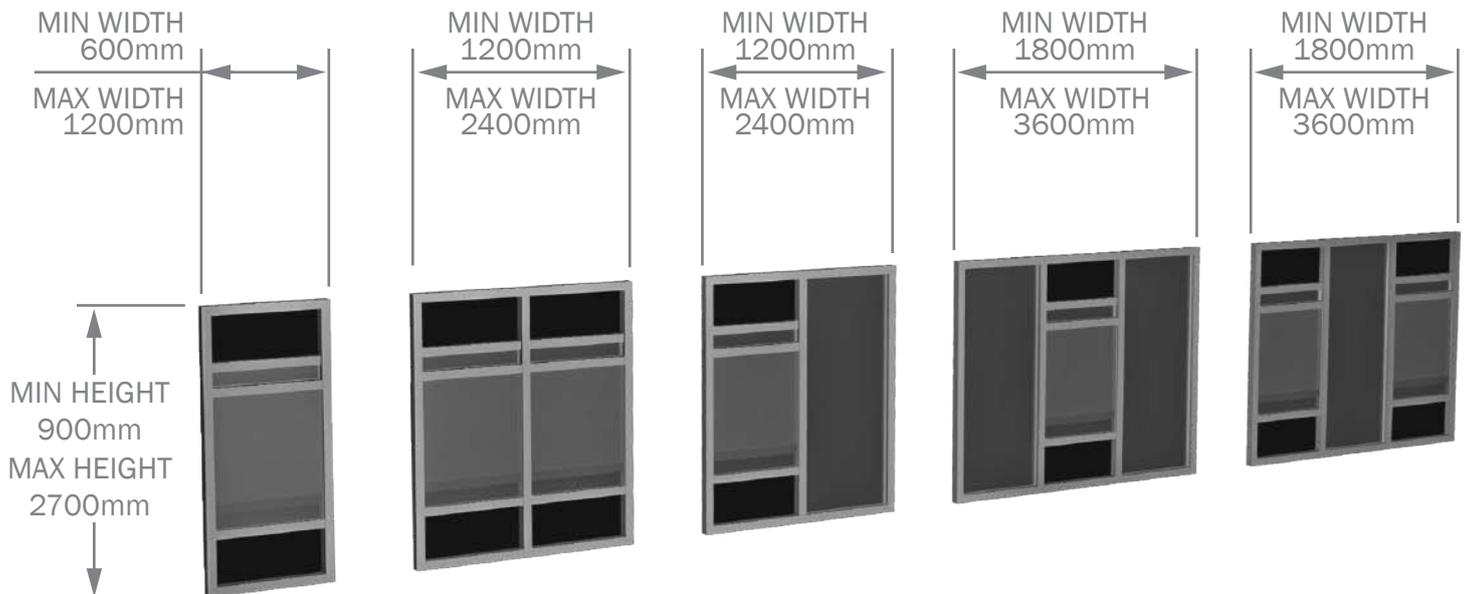

SIZE RESTRICTION: PRODUCT WIDTH CAN NEVER EXCEED HEIGHT

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Maximum double glazed panel thickness is 22mm

Certification

Certified performance data including WERS ratings are available for this product on request

Specify

Frame colour, configuration, height, width & overall depth

Optional: flyscreen, frame infill, frame equaliser, sill flap, glass type